

ORDER FORM

ORDER e: roofsales@ultraframe.co.uk

QUOTE e: quotes@ultraframe.co.uk

New Build Replacement Project **ROOF U-VALUE:** 0.15 (standard) 0.12 (thermally enhanced)

ACCOUNT No.

PLAN VIEW

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

FRONT ELEVATION

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

*Required for structural snow / wind loading

*Site Postcode

Roof Pitch (°)

Roof height restriction

Frame width

CUSTOMER NOTE: Please carefully read the Livingroof System Overview Guide before filling in order details.

LEFT ELEVATION

How to place an order for a Livingroof

1. Fill in above information and sketch plan and elevations showing position and dimensions of walls, brick piers, windows, doors, cut outs and intrusions. If necessary, attach photos of existing property.

2. Advise of the preferred position of any roof vents, rainwater pipes (RWP), tie bars and any additional information that may assist in specifying your order. If a Goalpost is needed, please complete page 3 of this order form.

3. A confirmation drawing will be created using our bespoke software and sent to you via email for you to check and sign. This will start the manufacture process. A delivery date will be emailed back as soon as it is scheduled.

Ultraframe are committed to not only offering the very best products but the best Customer Service experience. If you have any questions, queries or concerns please feel free to contact us on 01200 452 904 or email us on roofsales@ultraframe.co.uk and we will help any way we can.

If you have a technical question relating to our products, please contact our technical team on 01200 452 918 or email us on techsupport@ultraframe.co.uk.

You can also find technical help or any of our product literature on our website <https://trade.ultraframe-conservatories.co.uk/trade/media>

Order form

JOB REFERENCE

ROOF INFORMATION

On Fascia Below Fascia* Full Height Walls

If fitting to a bungalow please indicate Soffit Depth

**N.B. Below fascia is always on boxgutters, 30mm frame add on is needed but not supplied.*

BOX GUTTER OPTIONS:

- 165mm 165mm Chambered
 265mm Reinforced Box Gutter
Other, please state:

INTERNAL PELMET

Specify with this order Upgrade with retro fit Wall closer - 0mm (supplied as standard) 300-600mm

Original roof job no. if applicable:

EXTERNAL PANEL

- U-Tec through colour composite (to match 7016) Aluminium powder coated sandwich (to match 7016)

CORNICE

Style	1 Tier	2 Tier	3 Tier	Curved		
Colour	White	Urban Grey	Deeplas White	Landmark Green	Pure Cream	RAL/BS Colour
	RAL 9003,	RAL 7016,	INTERPON SC050E,	BS14C35,	RAL 1015,	
	GLOSS 80%	GLOSS 30%	GLOSS 80%	GLOSS 80%	GLOSS 30%	Gloss %

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Ultimate Blue	<input type="checkbox"/> Bronze 4S	Clear 4S
Aqua 4S	Blue 4S	
	Neutral 4S	

Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Std Aqua	<input type="checkbox"/> Std Bronze	Std Clear
	Std Blue	
	Std Neutral	

ROTABOND SEALANT - MS POLYMER

Black Tubes (NCGS001B)

Downpipe

Round
Square

CONSERVAFLASH

Soaker Only
Yes

ROOF VENTS AND MECHANISM (mark plan)

Roof vent with glass above

Brass	Manual Spindle	Manual Spindle and pole	Manual Spindle and telescopic pole
Chrome	Manual Spindle	Manual Spindle and pole	

Electric motor with digital thermostat and rain sensor

Electric motor and rocker switch

Electric motor with radio and remote control

Electric motor with thermostat (AVTD002)

Electric without switch/thermostat (Motor only)

ANCILLARY EXTRAS

Please refer to the Livingroof Technical Guide.

IMPORTANT NOTE 1

The installer is responsible for ensuring that where Livingroof is supported by means such as timber/PVCu frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through our system overview. Ultraframe cannot be responsible for the structural adequacy of any existing building work used as part of an overall conversion. While assistance is provided, ultimate responsibility to secure Building Regulations / approvals lies with the retail installer.

IMPORTANT NOTE 2

U-Design is the final arbiter on price and specification decisions.

IMPORTANT NOTE 3

The Livingroof components have been designed and manufactured to meet the specification of each individual job. Any significant on site modifications particularly relating to the repositioning of any structural members will invalidate the product's warranty and compromise the structures integrity. If adjustments are required due to site conditions please consult Ultraframe. Tie Bars / Tie Beams will be specified by Ultraframe and will appear on your confirmation. Always check the confirmation carefully.

Goalpost specification

Goalpost Colour

To match roof internals


Bespoke:- RAL colour

Leg length

Frame height

Length below floor/cill

Goalpost leg example

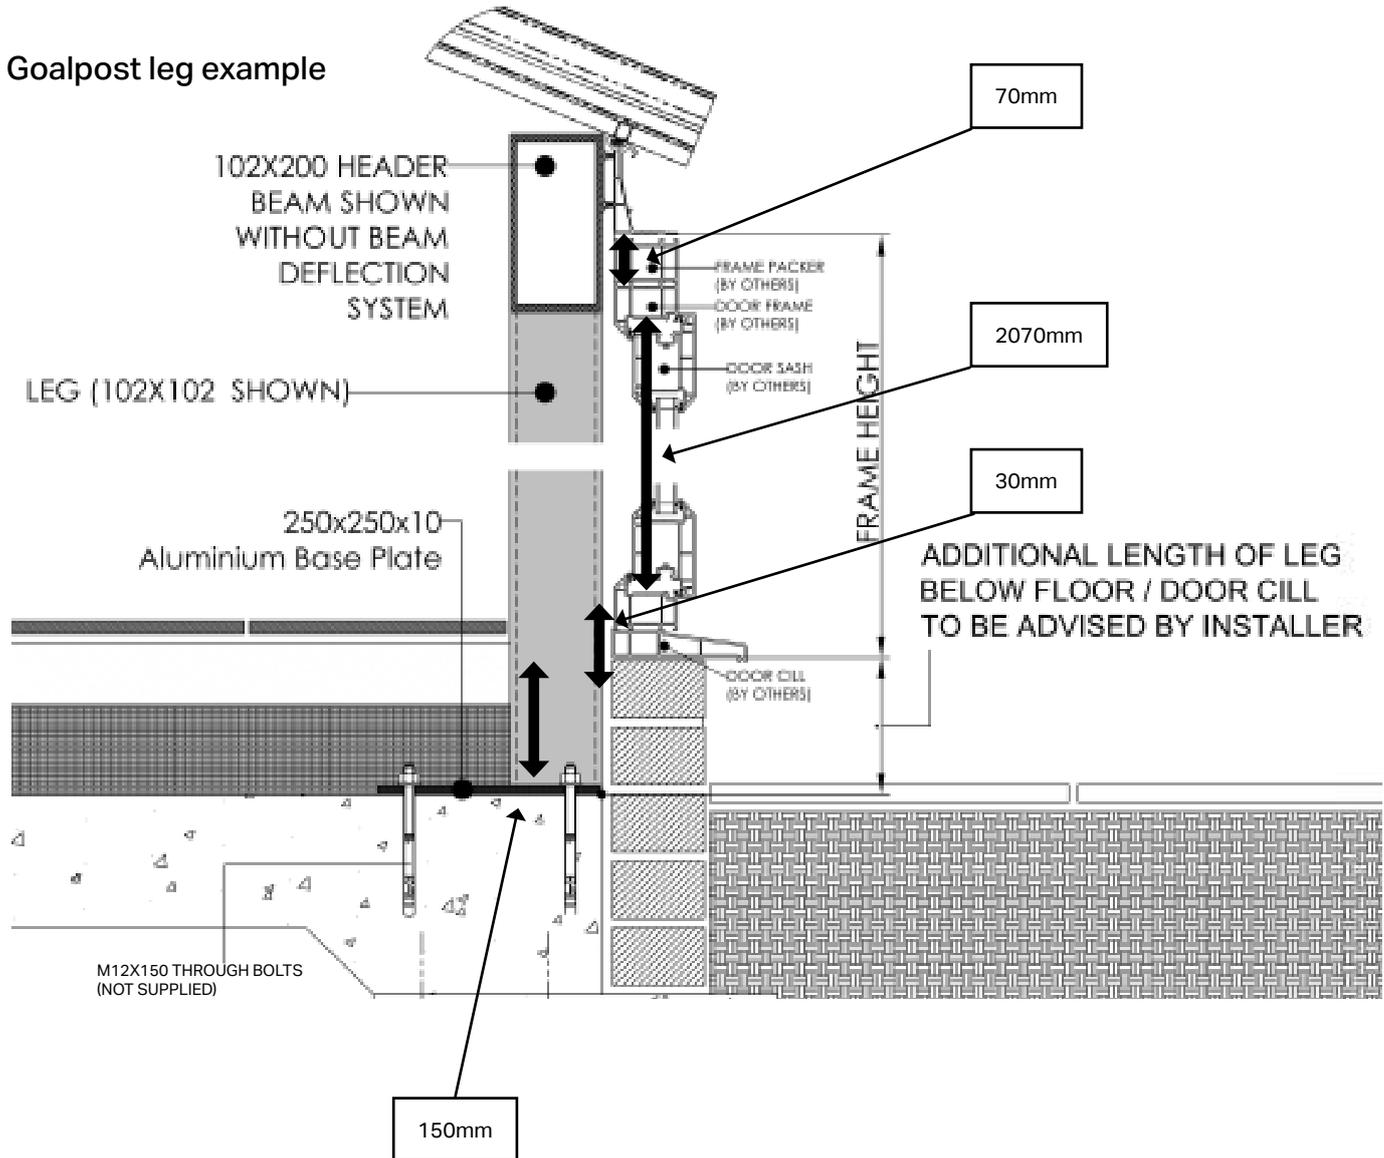

Disclaimer:

Ultraframe does not take responsibility for the structural stability of the entire structure, only the products provided by Ultraframe. To ensure the rest of the structure is suitable, it is the installers responsibility to ensure that all walls, foundations and building structure are compliant with Document A of Building Regulations. Any adjoining window frames must be a minimum of 70mm reinforced PVC frames, coupled in accordance with the manufacturer's recommendations. Host walls must be suitable to take the additional load and forces of the new building.

All beam end plates (WP and SP) must be bolted to a suitable substrate with adequate anchors. For the WP, the host wall suitability to accept the increased forces must be checked. The SP should be positioned on a suitable concrete padstone built into the supporting wall and strapped down to at least two additional courses.

Baseplates must be anchored using a minimum of 3no. M12 through bolts (minimum 6kN Tension/Uplift capacity per bolt). Foundations or floor slabs must be designed to accept the additional forces.

Order Form



2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

A large, empty grid area for drawing wall elevations. The grid consists of small squares, providing a guide for drawing dimensions and positions of walls, windows, and doors.

