

Order form

ORDER e: roofsales@ultraframe.co.uk

QUOTE e: quotes@ultraframe.co.uk

Glassroof

By Ultraframe

ACCOUNT No

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No

Email

Delivery Address

PLAN VIEW

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

*Required for structural snow / wind loading

*Site Postcode

Roof Pitch (°)

Roof height restriction

Frame width

FRONT ELEVATION

How to place an order for a Glass Roof

LEFT ELEVATION

RIGHT ELEVATION

1. Fill in above information and sketch plan and elevations showing position and dimensions of walls, brick piers, windows, doors, cut outs and intrusions. If necessary, attach photos of existing property.

2. Advise of the preferred position of any roof vents, rainwater pipes (RWP), tie bars and any additional information that may assist in specifying your order. If a Goalpost is needed, please complete page 3 of this order form.

3. A confirmation drawing will be created using our bespoke software and sent to you via email for you to check and sign. This will start the manufacture process. A delivery date will be emailed back as soon as it is scheduled.

In order to pass building regulations, all conservatory over 2.5m wide will need a glass U-value of at least 1.2. Smaller conservatories will need glass to be specified with 1.0 U-value. The thermal design guide within UDesign will provide the specific U-Value of each glass roof.

Ultraframe are committed to not only offering the very best products but the best Customer Service experience. If you have any questions, queries or concerns please feel free to contact us on 01200 452 904 or email us on roofsales@ultraframe.co.uk and we will help any way we can.

If you have a technical question relating to our products, please contact our technical team on 01200 452 918 or email us on techsupport@ultraframe.co.uk.

You can also find technical help or any of our product literature on our website <https://trade.ultraframe-conservatories.co.uk/trade/media>

Order form

JOB REFERENCE

ROOF COLOUR	White	Deeplas	Grained Grey	Smooth Grey	Mahogany	Light Oak	Rosewood	Black	Bespoke RAL/BS Colour
External	<input type="checkbox"/>								
Internal	<input type="checkbox"/>								

INTERNAL PELMET (when internal pelmet specified)

- 300mm Other (300-1200mm)

Please State (mm):

- On Fascia Below Fascia

If fitting to a bungalow please indicate Soffit Depth

CORNICE

- Style 1 Tier 2 Tier 3 Tier Curved
 Colour White Matt Grey Deeplas RAL/BS Colour

DOWNPIPE

- Round
 Square

CONSERVAFLASH

- Yes
 Eaves flow (eaves beam trickle ventilation)

RIDGE

- Classic Ridge
 Slimline Ridge (ONLY on 25° georgian roof)

TOP CAPPINGS

- Dome (PVCu) Aluminium
 Bevel (PVCu) Square Aluminium
(Mono pitch lean-tos only in grey or white)

BOX GUTTER OPTIONS:

- 165mm 165mm Chambered
 265mm Reinforced Box Gutter
 Other, please state:

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Ultimate Blue Aqua 4S	<input type="checkbox"/> Bronze 4S Blue 4S Neutral 4S	Clear 4S

Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
<input type="checkbox"/> Std Aqua	<input type="checkbox"/> Std Bronze Std Blue Std Neutral	Std Clear

POLYCARBONATE

- Size 25mm 35mm
 Colour Clear Opal Bronze Bronze / Opal Heatguard / Opal

UNGLAZED

- Polycarb 25mm 35mm
 Glass 24mm

ROTABOND SEALANT - MS POLYMER

- Black Tubes (NCGS001B)

ROOF VENTS AND MECHANISM (mark plan)

Roof vent up to ridge Roof vent with glass above

- Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole
 Chrome Manual Spindle Manual Spindle and pole
 Electric motor with digital thermostat and rain sensor Electric motor and rocker switch
 Electric motor with radio and remote control Electric motor with thermostat (AVTD002)
 Electric without switch/thermostat (Motor only)

DECORATION

Cresting	Renaissance	Tudor	Elizabethan	Baroque	Classic	Low profile	Aluminium
Finial	Pikestaff	Sceptre	Ball	Coronet	Classic	Low profile	Aluminium

ANCILLARY EXTRAS

Please refer to the Classic Technical Guide.

Goalpost specification

Goalpost Colour

To match roof internals

Bespoke:- RAL colour

Gloss Level %


Leg length

Frame height

Length below floor/cill

NB. It is advised not to order any windows or doors until goalpost specification has been finalised.

Goalpost leg example

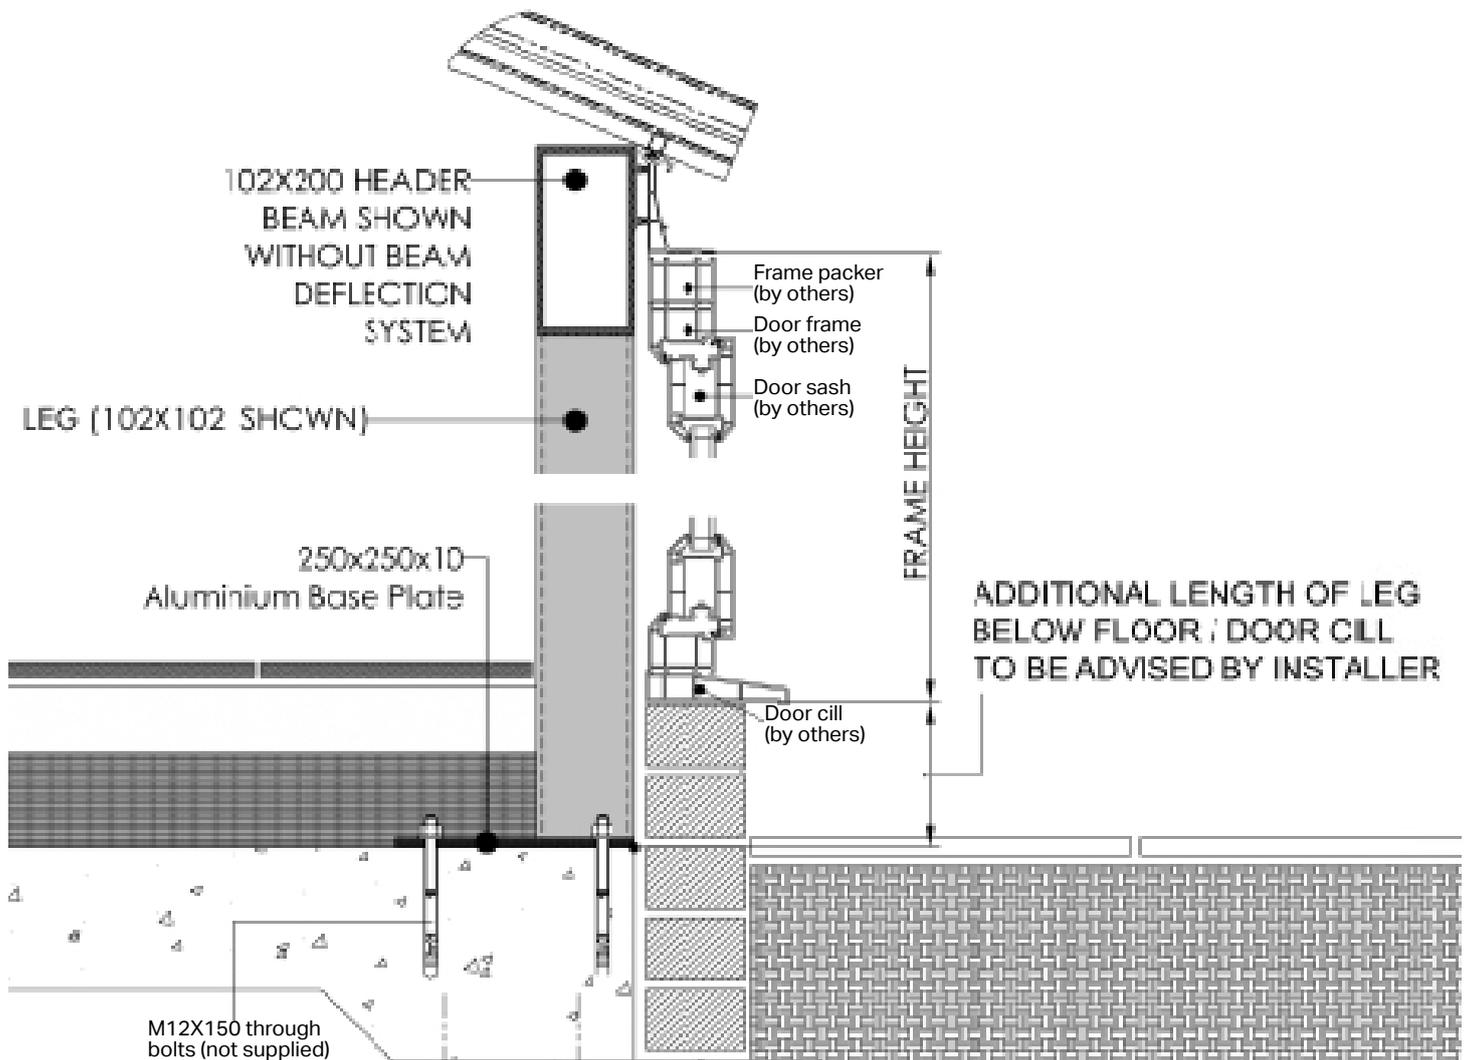

Disclaimer:

Ultraframe does not take responsibility for the structural stability of the entire structure, only the products provided by Ultraframe. To ensure the rest of the structure is suitable, it is the installers responsibility to ensure that all walls, foundations and building structure are compliant with Document A of Building Regulations. Any adjoining window frames must be a minimum of 70mm reinforced PVC frames, coupled in accordance with the manufacturer's recommendations. Host walls must be suitable to take the additional load and forces of the new building.

All beam end plates (WP and SP) must be bolted to a suitable substrate with adequate anchors. For the WP, the host wall suitability to accept the increased forces must be checked. The SP should be positioned on a suitable concrete padstone built into the supporting wall and strapped down to at least two additional courses.

Baseplates must be anchored using a minimum of 3no. M12 through bolts (minimum 6kN Tension/Uplift capacity per bolt). Foundations or floor slabs must be designed to accept the additional forces.

Order Form



2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

A large, empty grid area for drawing wall elevations. The grid consists of small squares, providing a guide for drawing dimensions and shapes.

