

STRATUS ENQUIRY FORM v10

Email all enquiries to: orders@stratus-lantern.co.uk

Tel: 01200 452904

Company:
Account No.
Address:
.....
Postcode:.....
Tel:
Fax:
Mobile:
Contact Name:

Important! Please note dimension for the Stratus lantern roof are taken to the outside of the timber support frame.


Quote: Order: Page: of

STYLE OPTIONS

Width W: mm


Length L: mm

Width (W) & Length (L) dimension
to outside of timber support frame

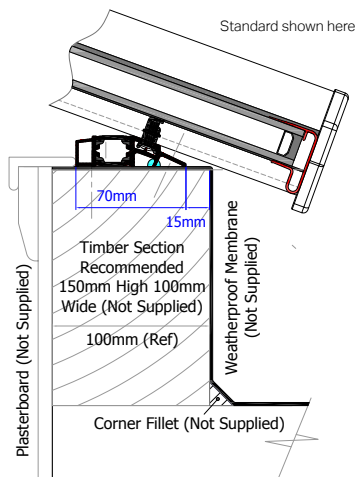

SKETCH OF DESIGN (EXTERNAL VIEW)

Use the template to draw the desired rafter layout of your roof design giving your dimensions in **millimetres**

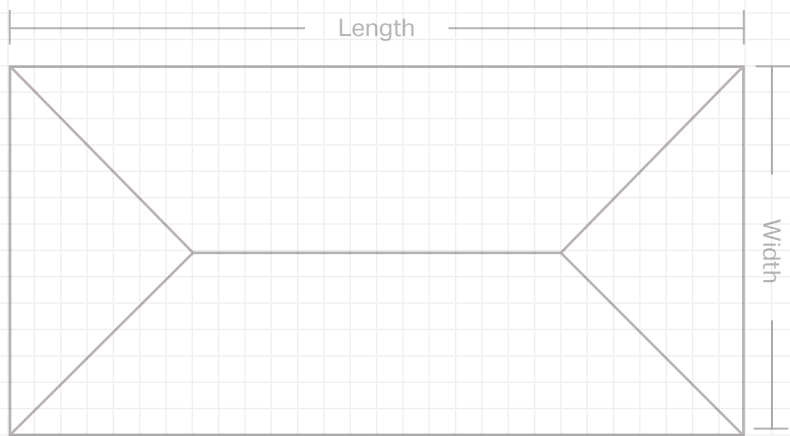

We will use 0.6kn/m² to calculate the snow loading on this roof, if you need this changed please let us know.

STYLE

- | | |
|----------------------------------|----------------------------------|
| ☐ Pyramid | ☐ Style 4 |
| ☐ Style 1 | ☐ Style 5 |
| ☐ Style 2 | ☐ Style 6 |
| ☐ Style 3 | ☐ Style 7 |

If a lantern style is not selected, then we will quote for the style with less bars.

ROOF COLOUR

- | External | Internal |
|--|--|
| ☐ White (RAL9016) | ☐ White (RAL9016) |
| ☐ Grey (RAL7016) | ☐ Grey (RAL7016) |
| ☐ Black (RAL9005) | ☐ Black (RAL9005) |
| ☐ RAL Colour | ☐ RAL Colour |

Grey is RAL 7016, Black is RAL 9005 60%. White is RAL 9016, while internal rafter trims are PVC-U.

Internal Finish

- ☐ PVC internal finish
☐ Aluminium internal finish

GLASS OPTIONS

- | | |
|--|--------------------------------------|
| Super Energy Saving Glass | Good Thermal Efficiency |
| Low Solar Gain | Low Solar Gain |
| ☐ Ultimate Blue | ☐ Std Aqua |
| ☐ Aqua 4S | Medium Solar Gain |
| Medium Solar Gain | ☐ Std Bronze |
| ☐ Bronze 4S | ☐ Std Blue |
| ☐ Blue 4S | ☐ Std Neutral |
| ☐ Neutral 4S | High Solar Gain |
| High Solar Gain | ☐ Std Clear |
| ☐ Clear 4S | |

ROOF VENT

- ☐ Roof vent to ridge
☐ Roof vent with glass above
☐ Roof vent to ridge and eaves beam
- ☐ <800mm ☐ >800mm
☐ Excluding Pole - Brass
☐ Excluding Pole - Chrome
☐ with Pole - Brass
☐ with Pole - Chrome
☐ with Pole - Brass Telescopic
☐ with Pole - Brass Med
☐ with Switch
☐ with Thermostat

GENERAL INFORMATION

- Roof Pitch Fixed 20°
- 24mm glazing in all lantern roofs
- All lantern roofs are supplied with Aluminium external glazing bar cappings and castings
- Lead time for orders: 8 - 10 Days
- Any 4 way lanterns bigger than 1.5m x 1.5m are limited to use in snow load areas of up to 1.07kn/m²
- Lengths up to 6m and widths up to 3m – see matrix for configuration details.
- Suggested timber support to be 100mm wide by 150mm high (not supplied with lantern roof). External Face of Timber Support.
- For optimum aesthetic appeal use Width W x 1.5/2/2.5 etc to obtain Length L (e.g 1400mm W x 1.5 = L 2100mm)

Roof vent specification:

- For kerb widths 70mm to 100mm, a full length vent it is only compatible with the Electric Motor. You cannot have a Manual Mechanism at all, because on all kerb widths the manual winder clashes with the internal of the kerb.
- Where the kerb width exceeds 100mm, you cannot have the full-length roof vent/vent extender at the bottom because both manual and electric motor will clash with the kerb.

The Stratus Lantern roof has been specifically designed to be fastened down to a structurally supportive upstand in a flat roof situation. It is the sole responsibility of the installing company to make sure the supporting superstructure is designed to resist the lateral loads imposed by the Stratus Lantern. We reserve the right to alter specifications and descriptions without prior notice as part of our policy of continuous development. E&OE. Version 2.

Date: / / Signed:

Print:

 **stratus**
thermal lantern roof

Tel: 01200 452904 | Email: orders@stratus-lantern.co.uk

Our conditions of sale shall apply to the sale of the goods to the exclusion of all other terms, unless agreed in writing by Ultraframe (UK) Ltd.