Flatroof Order / Quote Form **ORDER QUOTE** How to place an order for Flat Roof: ACCOUNT No. Date: **STEP 1: DRAW YOUR ROOF** Company Name: Draw a diagram of the roof with the external base size, internal Order Number: apertures, mark off outlets and any soil pipes. JOB REFERENCE: Please label each elevation as per your plan drawing (A, B, C, **Company Contact:** etc). For all elevations please include wall and frame thickness in mm (where applicable). Telephone No: Email: Please mark the apertures on the plan along with the dimensions for the aperture, internal size. Please use the **Delivery Address:** key below to mark your apertures e.g. a lantern and/ or flat skylight. Please mark any outlets and soil pipes, add on any dimensions. Postcode: Delivery Date Req: If possible, please send any photo's or additional plans to your order. **Quotation Ref:**

Draw Roof

Postcode:

CRITICAL INFORMATION


* Site Postcode (required for structural snow / wind loading)

External base size unlimited widths and projections of up to 5m. The Flat Roof is only available on square / rectangles sizes. Small intrusions like soil pipes are available but chimney breasts are not. Maximum soil pipe size is 266mm. You can specify 0, 1 or 2 apertures. Maximum: front opening up to 5670mm and side up to 3220mm.

KEY

Lantern

Flat Skylight

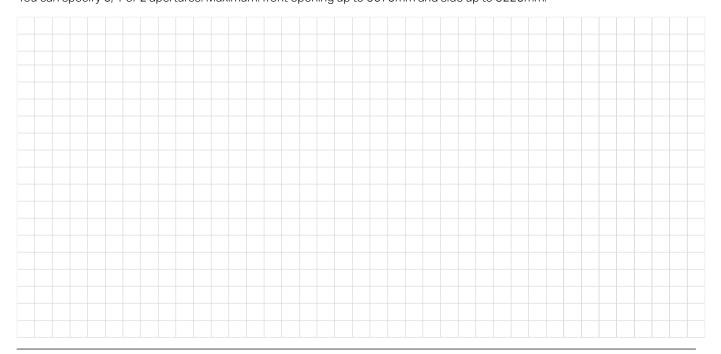

Please return to

Outlets / Downpipes

Soil pipe

Order / Quote Form



JOB REFERENCE:


STEP 2: MARK YOUR ELEVATIONS AND INDICATE THE FOLLOWING:

Please mark on the drawing plan below

- What the roof is sitting on e.g. frame or brick
- Thickness of frame or brick
- Height of wall standard eaves height is 2400mm unless specified.
- Opening location and size

If you would like a visual representation of your design, please confirm the colours of your frames.

If structural posts are needed, would you like Ultraframe to supply yes no

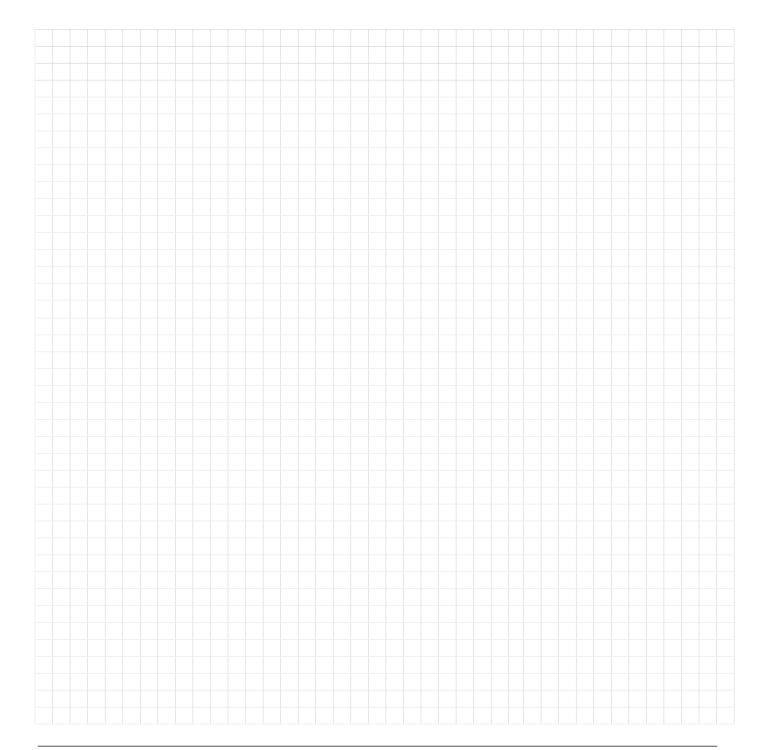

Order / Quote Form



JOB REFERENCE:

STEP 3: SPECIFY YOUR LANTERN / FLAT SKYLIGHT

Lantern

ROOF MATERIALS PVCu PVCu PVCu Aluminium 9003 Aluminium 7016 Aluminium 9005 White White 80% gloss Grey 30% gloss Black 60% gloss Painted Grey Black

External

Internal

BESPOKE COLOUR PVCu Ali

External RAL: Internal RAL:

GLASS OPTIONS - WARM EDGE SPACER

Tier 2 Tier 1 Tier 3 ☐ Std Blue Std Clear ☐ Ultimate Blue ☐ Blue 4S Bronze 4S Clear 4S Std Bronze Conservaglass

> Neutral 4S Aqua 4S Std Neutral Std Aqua

Unglazed

ROTABOND SEALANT - MS POLYMER

Black (NCGS001B) No. Tubes Req: N.B. For use with glass

ROOF VENTS AND MECHANISM

Manual with brass Manual with chrome Electric switch/mechanism Electric with rain sensor / thermostat

Flat Skylight

COLOUR: RAL9005 - 60% Black RAL9003 - 80% White RAL7016 - 30% Grey Bespoke RAL:

GLOSS %

GLASS OPTIONS: Standard, 26mm or 28mm (glass size dependent on skylight size) Clear Blue

STEP 4: CHOOSE YOUR SOFFIT

Please specify if you would like standard soffit or extended soffit.

Standard soffit Extended soffit



Standard soffit



Extended soffit

STEP 5: FASCIA OPTION

Please specify what fascia option you would like.

Classic Fascia Naked



Curved Cornice



Two Tier Flat Cornice



Four Tier Flat Cornice

STEP 5A: PICK YOUR FASCIA COLOUR

Please specify your fascia, gutter and cornice colour.

Fascia and gutter colour White Other: White Other: Cornice colour

Please note that roof membrane is not supplied and must be ordered separately. The Flat Roof System is compatible with most roof finishes such as GRP, EPDM or PVC membranes.

3

Order Form




Tick this box if you would like to order hup! walls with your roof

hup! Wall Specification:

1. Footprint

Please draw the footprint of your building marking each elevation A, B, C, D etc. You should **use the base datum** which lines up with the external of the Ultrapanel clips - wall finishes and battens will overhang the base. See specification guide for more details.

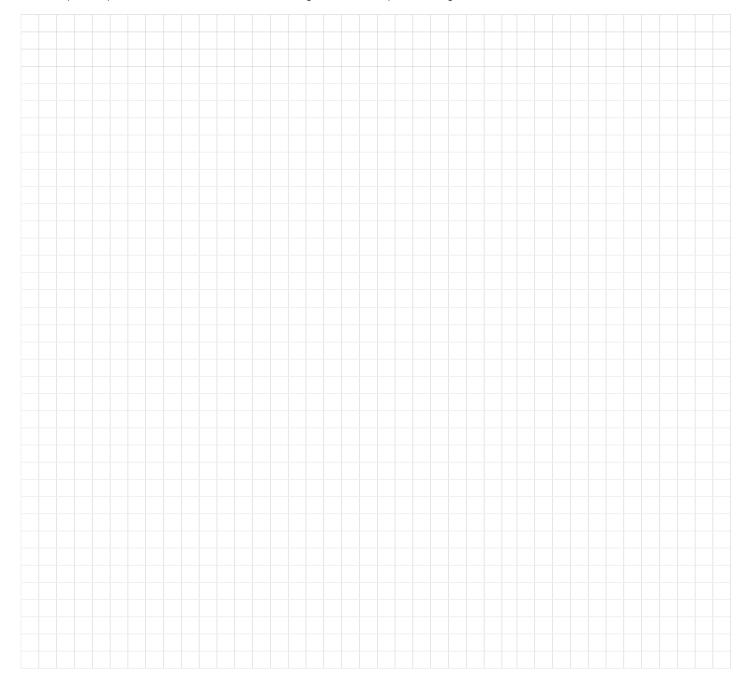

Extended Base Tray required?

Width of Cavity wall 300mm. See page 34 of Specification Guide for more details


Please note hup! walls will protrude at least 48mm (3mm for membrane and clips, 25mm for battens and 20mm for claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.

Order Form

2. El	2. Elevations Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance																																
Pleas from	se dra	aw e eave	ach e s as	eleva well	atio as 1	n o	f yo	ur hu or cle	ıp! v early	walls y.	ma	rki	ng the el	evati	ons	clea	rly v	with	Α, Ι	В, С,	Dε	etc.	Inclu	de w	indo	ow and	d doo	ors	sizes a	and c	lista	nce	
Tick	this b	ox i	f you	requ	uire	the	e ca	ble r	nar	nagei	men	t p	anel whi	ch is	sup	plied	on	all p	oan	els a	ode	ve 5	560mn	n.									

Order Form



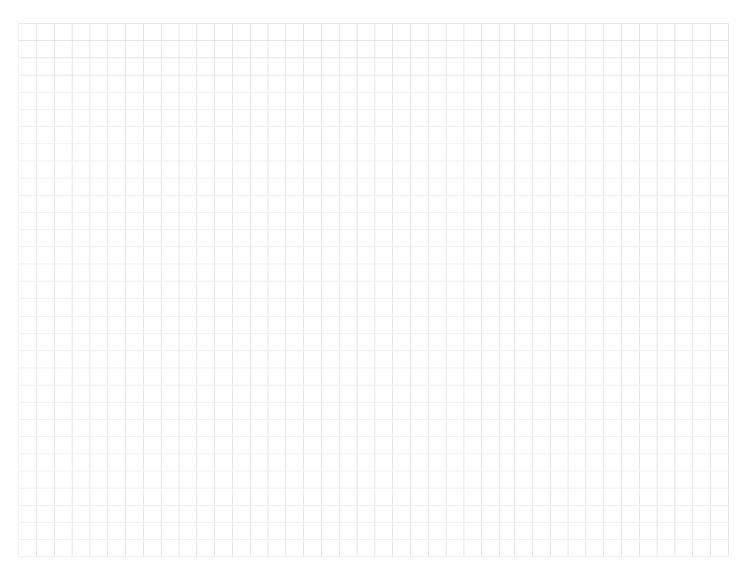

3. Wall Finishes (Claddings)

Circle which elements of the walling kit you will require to be supplied by Ultraframe

None - I am supplying my own Ventilation trim only

Aperture trim only

Batten kit (includes battens and fixings) Render Board kit (includes ventilation

trim, aperture trims and battens)

Brick Mesh (includes trims, battens and

render board)

Brick Mesh Specification:

Grey Brick/Medium mortar Multi Buff/Medium mortar Warm Buff/Medium mortar Terracotta/Medium mortar Multi Red/Medium mortar Multi Orange/Medium mortar Grey Brick/Light mortar

Multi Buff/Light mortar Warm Buff/Light mortar Terracotta/Light mortar Multi Red/Light mortar Multi Orange/Light mortar Grey Brick/Grey mortar

Tick 'Yes' if you need soldier courses above every window and door where there is space under the eaves. YES

Surveyor's Details

For the next 6 months, we will discuss every hup! order with the surveyor to ensure that it has been specified correctly, and therefore, avoid any potential errors on site. Please include your surveyor's details below.

NAME:

CONTACT NO:

EMAIL ADDRESS: