

ORDER FORM ULTRAROOF ALL TILE



ORDER e: roofsales@ultraframe.co.uk

QUOTE e: quotes@ultraframe.co.uk

New Build

Replacement Project

PLEASE SKETCH YOUR PREFERRED DESIGN HERE

- mark window, door & wall positions/types.

INDICATE ON DRAWINGS IF ANY PART OF THE PROJECT IS EXISTING

DIMENSIONS

Internal frame to internal frame

ROOF U-VALUE:

0.15 (standard)

0.12 (thermally enhanced)

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No.

Email

Delivery Address

PLAN VIEW

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

***Required for structural snow / wind loading**

Site Postcode

Roof Pitch

FRONT ELEVATION

HOW TO PLACE AN ORDER FOR ULTRAROOF ALL TILE :

1. Sketch plan & elevations.
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
3. Mark the preferred positions of any
a) roof windows
4. Upon placement of your Ultraroof order, an order confirmation is generated which must be signed and emailed back.

LEFT ELEVATION

RIGHT ELEVATION

NOTES:

Please see Ultraroof system overview guide for list of what IS / IS NOT included. Soffit, fascia, tiles and rainwater goods are not supplied with All Tile.

DECIDE SOFFIT OVERHANG Select appropriate option from all options on page 2.


Please sign and return to
roofsales@ultraframe.co.uk

SIGNED:

DATE:

Ultrarooft on frames

40mm soffit




Brick & Block



hup!

151.5mm soffit




Brick & Block



hup!

Ultrarooft on walls

72.5mm soffit




Brick & Block



hup!

Large soffits



Brick & Block




hup!

Boundary wall options - Brick & block only



-190mm soffit

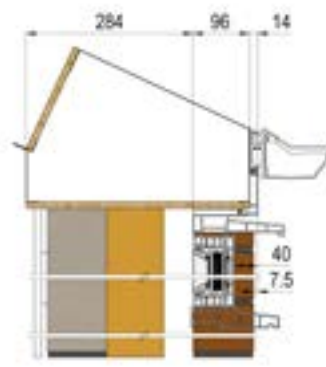

0 soffits

STRUCTURAL GALLOWS BRACKET FOR BOX BEAM (if design needs one, check survey guide)

QTY

Soffit size (if there is one)

VELUX ROOF WINDOW (Velux windows not supplied. Velux products not included in price)
Please indicate positions on plan. NOTE: Ensure a Velux EDL flashing kit is ordered for each Velux window (not supplied).

CK01

CK02

CK04

CK06

The installer is responsible for ensuring that where Ultrarooft is supported by means such as masonry or timber frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through Ultrarooft's technical documentation/guides. Ultraframe is not responsible for the structural adequacy of any existing building work used as part of an overall project. Whilst assistance is provided ultimate responsibility for securing Building Regulations lies with the retail installer.

For further guidance please contact the Technical Support Team on 01200 452918 or email techsupport@ultraframe.co.uk

Please sign and return to
roofsales@ultraframe.co.uk

SIGNED:

DATE:

hup!
The better way to build

Are you using the hup! Base? Yes No

If yes, please answer the questions below:

What height is the base DPC to ground?.....

Which foundations will you be using? Pads Ground screws

If using ground screw, please indicate the name of your ground screw provider. GBGS Other supplier

Which skirt finish do you require? Plain Brick slips (brick type)

If you have a sloping skirt, please draw it on the diagram, giving a measurement every metre.

If you would like brick slips, please let us know the brick type and mortar colour.

Brick type **Red Multi** **Smooth Anthracite** **Smooth Red** **Rustic Buff Multi**

Mortar colour Grey Sand Red


Intrusions needed (please mark on the base plan below)	Drain cover	Obstruction	Drain Pipes
--	-------------	-------------	-------------

Please draw the footprint of your building marking each elevation A, B, C, D etc. Tick the box to indicate which dimension you are using

Existing base size

Finished wall size

hup! base size (to edge of hup! clips)



Is hup! going on a existing wall? Yes No

What is the thickness of existing wall?mm

Do you want it on cill or full clad? Cill (use internal frame dimension) Full Clad (use external base dimension)

If on cill, please send over ONLY the internal frame dimension. If using full clad, please send over ONLY the external base dimensions.

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin gray lines. There are no margins, text, or other markings on the page.

Width of Cavity wall 300mm. See hup! Specification Guide for more details.

Please return to quotes@ultraframe.co.uk

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

