

ORDER FORM
ULTRAROOF ALL TILE



ORDER e: roofsales@ultraframe.co.uk
QUOTE e: quotes@ultraframe.co.uk
New Build Replacement Project

PLEASE SKETCH YOUR PREFERRED DESIGN HERE
- mark window, door & wall positions/types.
INDICATE ON DRAWINGS IF ANY PART OF THE PROJECT IS EXISTING

DIMENSIONS Internal frame to internal frame
ROOF U-VALUE: 0.15 (standard) 0.12 (thermally enhanced)

ACCOUNT No.

Company Name
Order Number

PLAN VIEW

JOB REFERENCE

Installer Company Name
Company Contact
Telephone No.
Email
Delivery Address

POSTCODE

Delivery Date Req
Quotation Ref

FRONT ELEVATION

CRITICAL INFORMATION
***Required for structural snow / wind loading**

Site Postcode
Roof Pitch

**HOW TO PLACE AN ORDER FOR
ULTRAROOF ALL TILE :**

1. Sketch plan & elevations.
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark and caption the positions of all walls, brick piers, windows/doors, cut outs / intrusions.
3. Mark the preferred positions of any
a) roof windows
4. Upon placement of your Ultraroof order, an order confirmation is generated which must be signed and emailed back.

LEFT ELEVATION

RIGHT ELEVATION

NOTES:
Please see Ultraroof system overview guide for list of what IS / IS NOT included. Membrane, Soffit, fascia, tiles and rainwater goods are not supplied with All Tile.

DECIDE SOFFIT OVERHANG Select appropriate option from all options on page 2.


Please sign and return to
roofsales@ultraframe.co.uk

SIGNED:

DATE:

UltraRoof on frames

40mm soffit

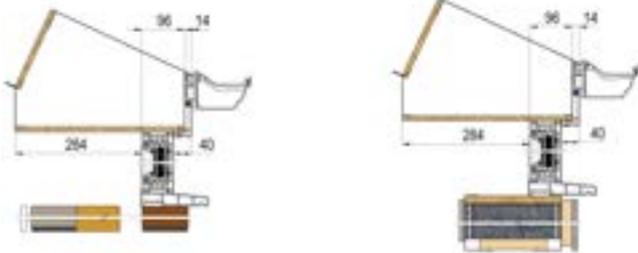

Brick & Block

hup!

151.5mm soffit




Brick & Block

hup!

UltraRoof on walls


72.5mm soffit

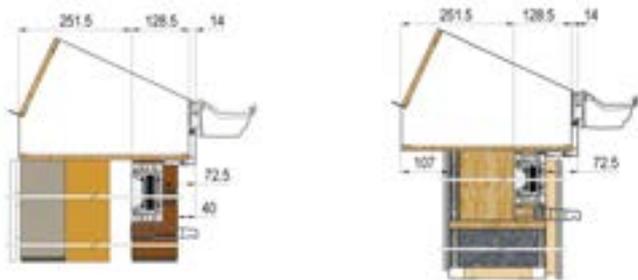

Brick & Block

hup!


Large soffits

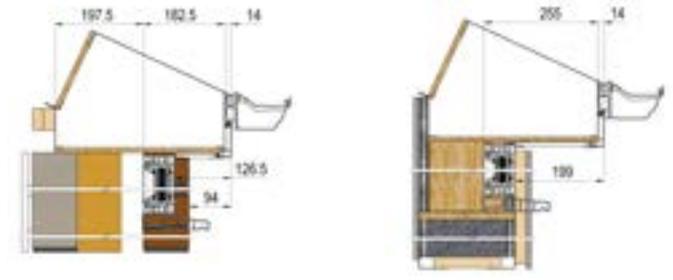


Brick & Block

hup!

Boundary wall options - Brick & block only

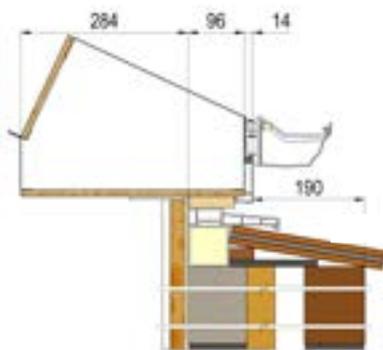

-190mm soffit

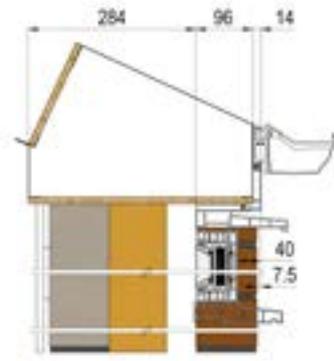

0 soffits

STRUCTURAL GALLOWS BRACKET FOR BOX BEAM
(if design needs one, check survey guide)

GABLE RE-INFORCING BOX - Standard on gable- optional on lean to.
(If ticked, please confirm frame colour)

QTY

*See page 70 of system guide for guidance on need for gable re-inforcing box.

Soffit size (if there is one)

VELUX ROOF WINDOW (Velux windows not supplied. Velux products not included in price)
Please indicate positions on plan. NOTE: Ensure a Velux EDL flashing kit is ordered for each Velux window (not supplied).

CK01

CK02

CK04

CK06

The installer is responsible for ensuring that where UltraRoof is supported by means such as masonry or timber frame walls, the structure provides enough lateral support and resistance to wind uplift. Further guidance can be obtained through UltraRoof's technical documentation/guides. Ultraframe is not responsible for the structural adequacy of any existing building work used as part of an overall project. Whilst assistance is provided ultimate responsibility for securing Building Regulations lies with the retail installer.

For further guidance please contact the Technical Support Team on 01200 452918 or email techsupport@ultraframe.co.uk

Please sign and return to
roofsales@ultraframe.co.uk

SIGNED:

DATE:

2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm.

A large grid area for drawing wall elevations. The grid consists of 30 columns and 40 rows of small squares, providing a space for the customer to draw their wall elevations, marking them with letters A, B, C, D, etc., and including window and door sizes and distances from the eaves and floor.

