

ORDER FORM

- ☐ **ORDER** e: partsales@ultraframe.co.uk
- ☐ **QUOTE** e: quotes@ultraframe.co.uk
- ☐ New Build ☐ Existing flat roof

Fill in the dimensions in the boxes below.

- Please note all dimensions are to the internal face of the kerb (excluding plasterboard).
- Measurement size of kerb height needs to be minimal 150mm (internal aperture).
- Slope / width is always the smallest size.

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Company Contact

Telephone No.


Email

Delivery Address

POSTCODE

Delivery Date Req

Quotation Ref

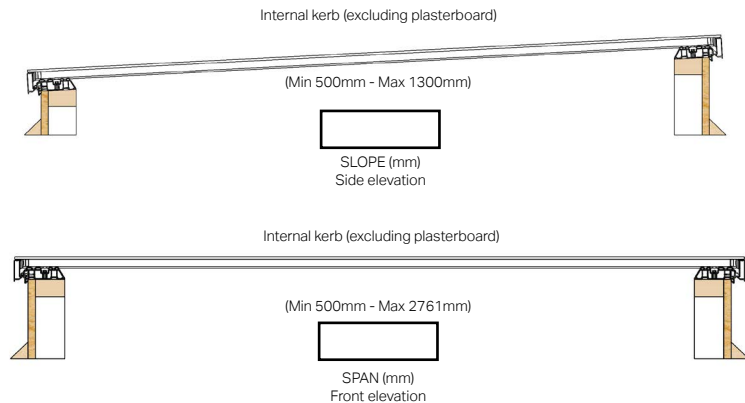

Spans up to 2761mm and slopes of 1300mm – see matrix for configuration details.

ROOF SPECIFICATION

COLOUR: RAL9005 - 60% Black ☐ RAL9003 - 80% White ☐ RAL7016 - 30% Grey ☐ Bespoke RAL:

GLOSS %

CONSERVAGLASS OPTIONS: Standard 28mm ☐ Clear ☐ Blue

CUSTOMER NOTE: Please carefully read the Ultrasky Flat Skylight installation guide before filling in order details.

The minimum distance between flat skylights is 400mm

Glass Specification: Glass is 28mm and available in Clear and Blue glass options. See price list for details.

Outer Layer - 6mm Clear/Blue Toughened / Argon filled cavity with warm edge spacer.

Inner Layer - 4mm or 6mm (size dependent) high performance, Low E, toughened.


Glass U-value as low as 1.0 glass.

Smaller sizes have glass u-value of 1.1 and larger sizes have glass u-value 1.0
Inner panes on glass units must be laminated in applications more than 5 metres above floor level or are located over a body of water.

DISCLAIMER

The builder/installer is responsible for providing / checking structural deck. Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. Not suitable to walk on the glass. If specifying overhead glass in Flat Skylights or Lanterns more than 5 meters above ground level or located over water (such as a swimming pool), laminated glass should be specified for the inner pane (as defined in British Standards).

The flat skylight must be installed at a pitch of 4° on the slope (shorter side), this will ensure water will run off the glass and stop pooling of water which can cause mould. Contact 01200 452918 for guidance.

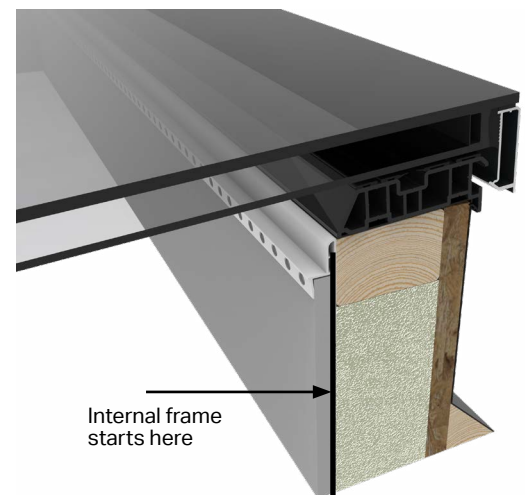

Job No.:3598

Please sign and return to

partsales@ultraframe.co.uk

SIGNED

DATE

Note: Upon placement of your Ultrasky Flat Skylight order, no drawing confirmation will be sent so please ensure information provided is accurate.